
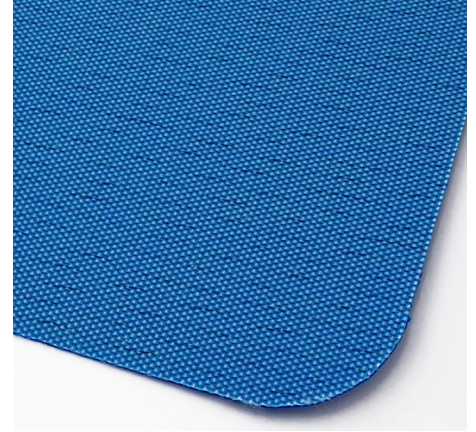


SMOOTH SURFACE

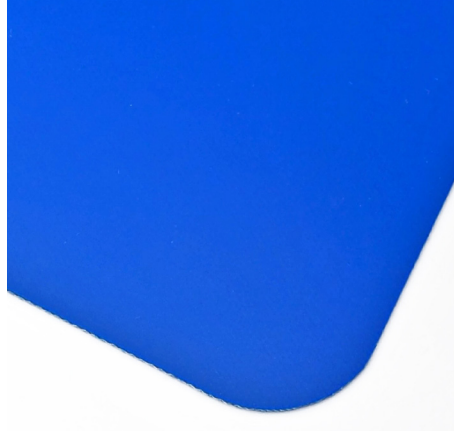


TEXTILE CARCASS		CONVEYING SURFACE	DRIVING SURFACE
Material:	POLYESTER	Material:	TPU
Number of plies:	1	Thickness:	0,2 mm
Fabric:	RIGID	Surface:	SMOOTH
		Color:	BLUE
		Hardness Shore A:	-
		(+/- 5)	
			Material: FABRIC WITH TPU IMPREGNATION
			Thickness: -
			Surface: FABRIC
			Color: LIGHT BLUE
			Hardness Shore A: -

TECHNICAL DATA SHEET

BELT THICKNESS	WEIGHT KG/M2	WORKING LOAD AT 1% ELONGATION	MAX ADMISSIBLE PULL	MINIMUM PULLEY DIAMETER		WORKING TEMPERATURE °C	ANTISTATIC
				FLEXING	BACK FLEXING		
0,7 mm	0,70	5 N/mm	5 N/mm	6 mm	16 mm	-30 / 110	YES

MOST POPULAR APPLICATION

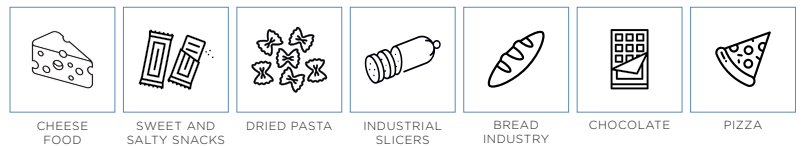

CHEESE FOOD

SWEET AND SALTY SNACKS

DRIED PASTA

INDUSTRIAL SLICERS

BREAD INDUSTRY

CHOCOLATE

PIZZA