


**FM SURFACE**

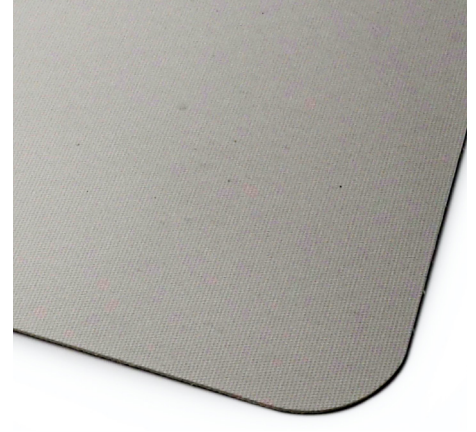

TEXTILE CARCASS		CONVEYING SURFACE	DRIVING SURFACE
Material:	<b>POLYESTER</b>	Material:	<b>TPU</b>
Number of plies:	<b>1</b>	Thickness:	<b>0,3 mm</b>
Fabric:	<b>RIGID</b>	Surface:	<b>FM</b>
		Color:	<b>WHITE</b>
		Hardness Shore A:	<b>-</b>
		(+/- 5)	
			Material: <b>FABRIC WITH TPU IMPREGNATION</b>
			Thickness: <b>0,3</b>
			Surface: <b>FL</b>
			Color: <b>WHITE</b>
			Hardness Shore A: <b>-</b>

**TECHNICAL DATA SHEET**

BELT THICKNESS	WEIGHT KG/M2	WORKING LOAD AT 1% ELONGATION	MAX ADMISSIBLE PULL	MINIMUM PULLEY DIAMETER		WORKING TEMPERATURE °C	ANTISTATIC
				FLEXING	BACK FLEXING		
<b>1,4 mm</b>	<b>1,40</b>	<b>5 N/mm</b>	<b>5 N/mm</b>	<b>10 mm</b>	<b>15 mm</b>	<b>-30 / 110</b>	<b>NOT</b>

**MOST POPULAR APPLICATION**



PACKAGING

MEAT

ELECTRONIC SCALES