
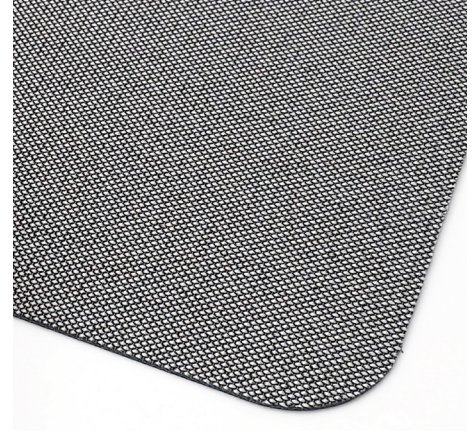


SMOOTH SURFACE

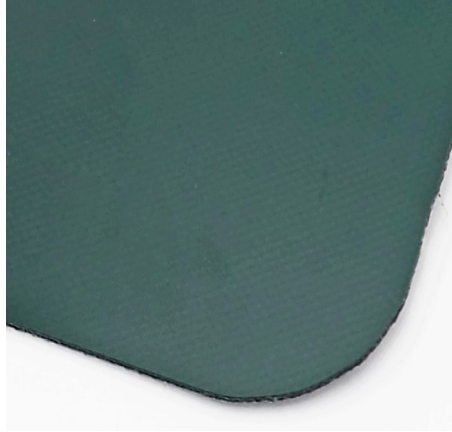

TEXTILE CARCASS

Material: **POLYESTER**
 Number of plies: **2**
 Fabric: **RIGID**
KNIFE EDGE

CONVEYING SURFACE

Material: **TPU**
 Thickness: **0,2 mm**
 Surface: **SMOOTH**
 Color: **GREEN**
 Hardness Shore A: **-**
 (+/- 5)

DRIVING SURFACE

Material: **FABRIC WITH TPU IMPREGNATION**
 Thickness: **-**
 Surface: **FABRIC**
 Color: **WHITE**
 Hardness Shore A: **-**

TECHNICAL DATA SHEET

BELT THICKNESS	WEIGHT KG/M2	WORKING LOAD AT 1% ELONGATION	MAX ADMISSIBLE PULL	MINIMUM PULLEY DIAMETER		WORKING TEMPERATURE °C	ANTISTATIC
				FLEXING	BACK FLEXING		
1,5 mm	1,50	8 N/mm	16 N/mm	12 mm	16 mm	-20 / 100	YES

MOST POPULAR APPLICATION

						
WOOD INDUSTRY	PACKAGING	MECHANICAL INDUSTRY	TEXTILE INDUSTRY	PAPER INDUSTRY	MATERIAL HANDLING	AUTOMATION OF POST