




SMOOTH SURFACE

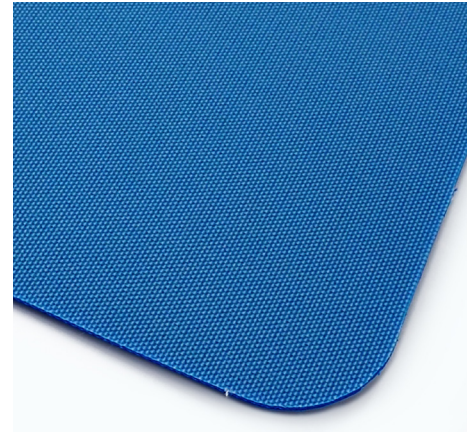


TEXTILE CARCASS		CONVEYING SURFACE		DRIVING SURFACE	
Material:	POLYESTER	Material:	TPU	Material:	FABRIC WITH TPU IMPREGNATION
Number of plies:	2	Thickness:	0,2 mm	Thickness:	-
Fabric:	RIGID	Surface:	SMOOTH	Surface:	FABRIC
	KNIFE EDGE	Color:	BLUE	Color:	LIGHT BLUE
		Hardness Shore A:	-	Hardness Shore A:	-
		(+/- 5)			

TECHNICAL DATA SHEET

BELT THICKNESS	WEIGHT KG/M2	WORKING LOAD AT 1% ELONGATION	MAX ADMISSIBLE PULL	MINIMUM PULLEY DIAMETER		WORKING TEMPERATURE °C	ANTISTATIC
				FLEXING	BACK FLEXING		
1,3 mm	1,40	6 N/mm	12 N/mm	8 mm	16 mm	-30 / 110	YES

MOST POPULAR APPLICATION

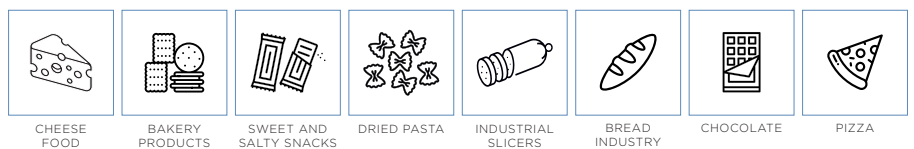

CHEESE FOOD

BAKERY PRODUCTS

SWEET AND SALTY SNACKS

DRIED PASTA

INDUSTRIAL SLICERS

BREAD INDUSTRY

CHOCOLATE

PIZZA