


SMOOTH SURFACE

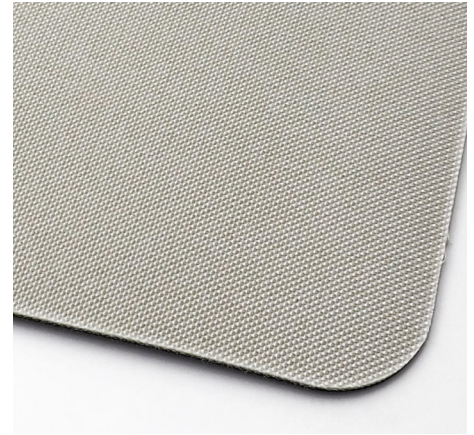

TEXTILE CARCASS

Material: **POLYESTER**
Number of plies: **2**
Fabric: **COMBINED**

CONVEYING SURFACE

Material: **PVC**
Thickness: **0,3 mm**
Surface: **SMOOTH**
Color: **BLACK**
Hardness Shore A: **70**
(+/- 5)

DRIVING SURFACE

Material: **FABRIC WITH TPU IMPREGNATION**
Thickness: **-**
Surface: **LdB FABRIC**
Color: **WHITE**
Hardness Shore A: **-**

TECHNICAL DATA SHEET

BELT THICKNESS	WEIGHT KG/M2	WORKING LOAD AT 1% ELONGATION	MAX ADMISSIBLE PULL	MINIMUM PULLEY DIAMETER		WORKING TEMPERATURE °C	ANTISTATIC
				FLEXING	BACK FLEXING		
1,8 mm	2	6 N/mm	12 N/mm	20 mm	25 mm	-10 / 60	YES

MOST POPULAR APPLICATION



CASH BOXES

PACKAGING

PAPER INDUSTRY

TEXTILE INDUSTRY