



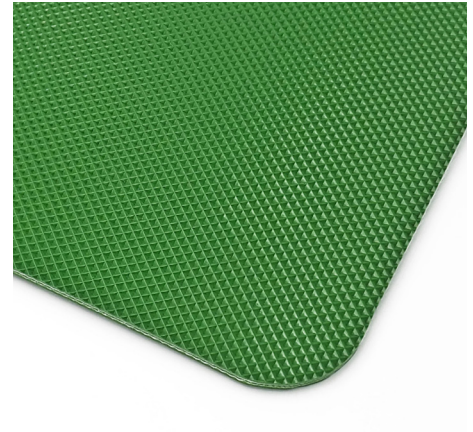

SMOOTH SURFACE

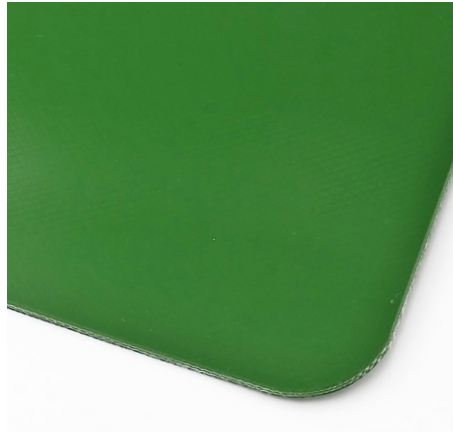

TEXTILE CARCASS

Material: **POLYESTER**
Number of plies: **2**
Fabric: **FLEXIBLE**

CONVEYING SURFACE

Material: **PVC**
Thickness: **1,0 mm**
Surface: **SMOOTH**
Color: **APPLE GREEN**
Hardness Shore A: **60**
(+/- 5)

DRIVING SURFACE

Material: **PVC**
Thickness: **0,5**
Surface: **PN**
Color: **APPLE GREEN**
Hardness Shore A: **60**

TECHNICAL DATA SHEET

BELT THICKNESS	WEIGHT KG/M2	WORKING LOAD AT 1% ELONGATION	MAX ADMISSIBLE PULL	MINIMUM PULLEY DIAMETER		WORKING TEMPERATURE °C	ANTISTATIC
				FLEXING	BACK FLEXING		
3,1 mm	3,6	12 N/mm	24 N/mm	80 mm	120 mm	-15 / 60	NOT

MOST POPULAR APPLICATION



FOOD AND AGRICULTURE