


TEXTILE CARCASS		CONVEYING SURFACE	DRIVING SURFACE
Material:	<b>POLYAMIDE</b>	Material: <b>SYNTHETIC ELASTOMER</b>	Material: <b>FABRIC WITH TPU IMPREGNATION</b>
Number of plies:	<b>2</b>	Thickness: <b>0,5 mm</b>	Thickness: <b>-</b>
Fabric:	<b>FLEXIBLE</b>	Surface: <b>FL</b>	Surface: <b>FABRIC</b>
		Color: <b>GREEN</b>	Color: <b>BLACK</b>

**TECHNICAL FEATURES**

BELT THICKNESS	WEIGHT KG/M2	WORKING LOAD AT 1% ELONGATION	MAX ADMISSIBLE PULL	MINIMUM PULLEY DIAMETER		WORKING TEMPERATURE °C	ANTISTATIC
				FLEXING	BACK FLEXING		
2,0 mm	2,10	3,5 N/mm	7 N/mm	20 mm	25 mm	-20 / 100	YES

**MOST POPULAR APPLICATION**

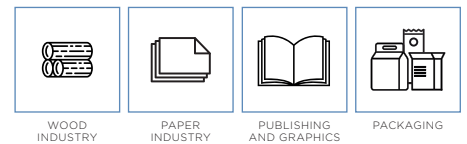

WOOD  
INDUSTRY

PAPER  
INDUSTRY

PUBLISHING  
AND GRAPHICS

PACKAGING